


## WR34(BJ260) Small Size Waveguide Termination, RWT3415 21.7-33GHz, 15W, FBP260(UBR) Flange, Rectangular

### Dimensions(mm) Tolerance±1%

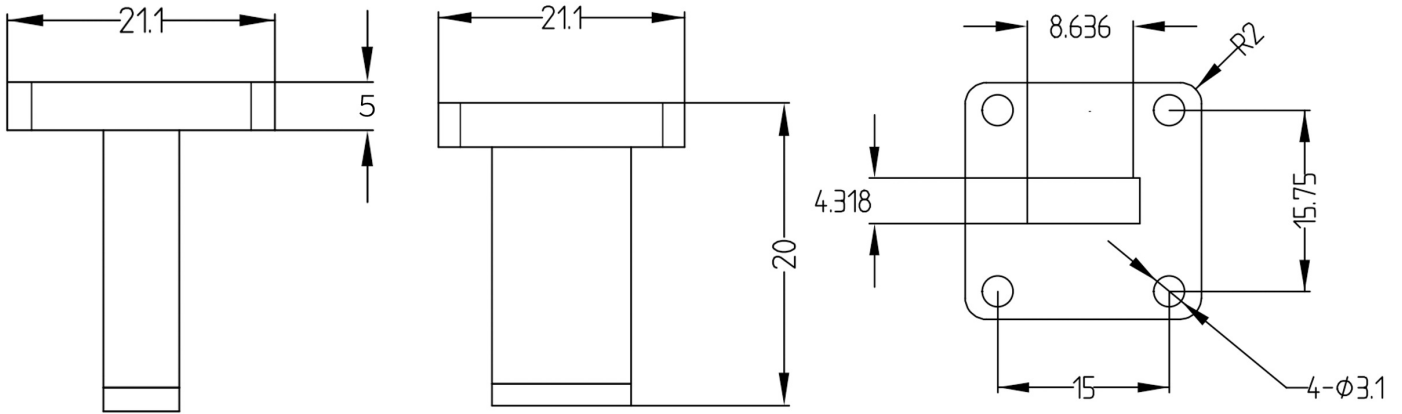


### Electrical & Environmental

Frequency Range	21.7-33GHz	Impedance	50 ohm	VSWR	1.2 max
Input Avg Power	15W @25°C	Peak Power	-		

### Mechanical & Product Information

Product Number	RWT3415, P-Grade	Waveguide	WR34(BJ260), FBP260(UBR) Flange
Waveguide Body	Copper, grey painted	Heat Sink	N/A
Waveguide Cavity	Copper, electric conductive oxidation		
Operating Temp	-55°C~+100°C	Net Weight	About 18.0g

### Typical Test Data

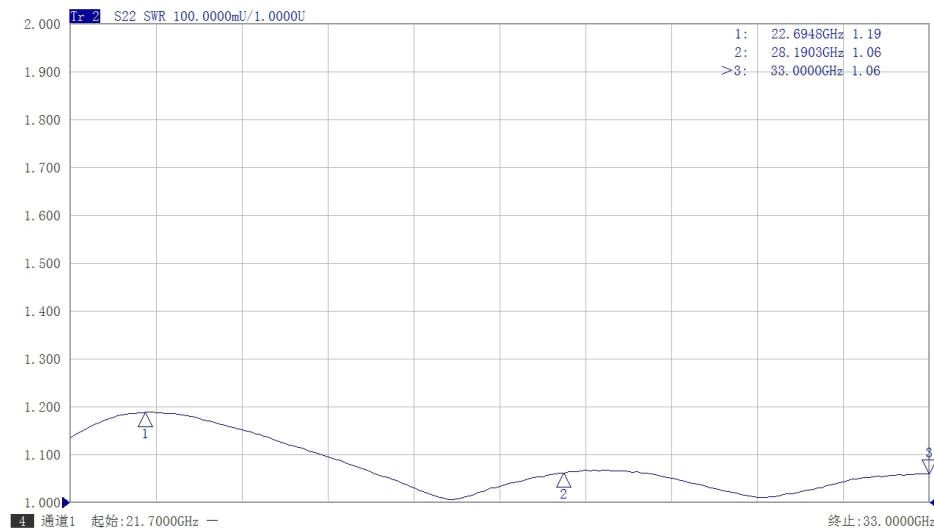

### Notes

1. Customized outlines and optimal VSWR available.
2. Refer to the derating curve for power input, derate linearly to 2W at 100°C.
3. To maintain best performance, recommended to use fan to keep the case temp under 85°C.

