




WR34(BJ260) Waveguide Matched Termination, RWT34 21.7-33GHz, 1W, FBP260(UBR) Flange, Rectangular

Dimensions(mm) Tolerance±1%

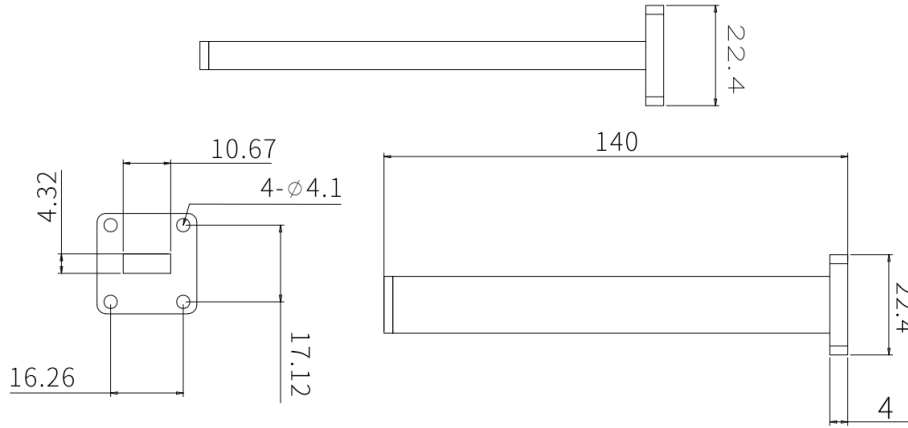


Electrical & Environmental

Frequency Range	21.7-33GHz	Impedance	50 ohm	VSWR	1.03 max
Input Avg Power	1W @25°C	Peak Power	-		

Mechanical & Product Information

Product Number	RWT34, High-Precision	Waveguide/Flange	WR34(BJ260), FBP260(UBR) Flange
Waveguide Body	Copper, grey painted	Heat Sink	N/A
Waveguide Cavity	Copper, electric conductive oxidation		
Operating Temp		Net Weight	About 55.0g

Typical Test Data

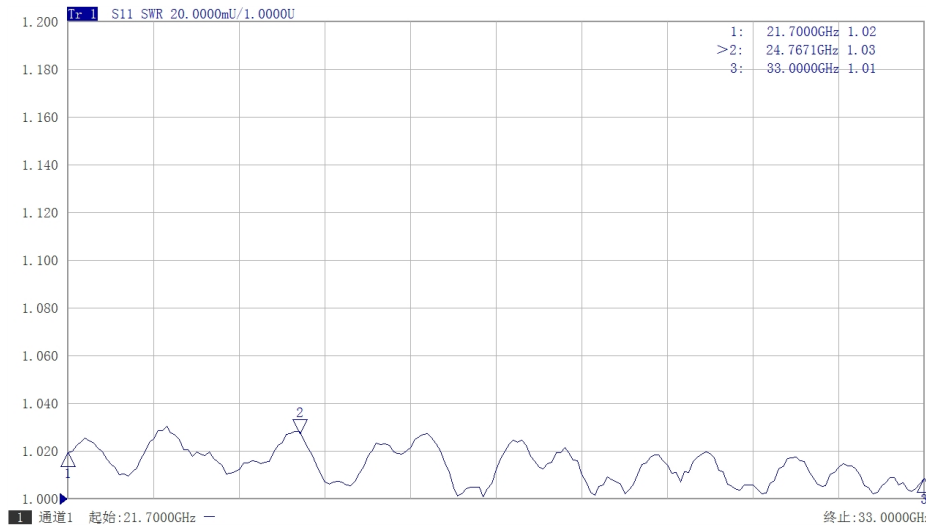

Notes

1. Customized outlines and optimal VSWR available.
2. Refer to the derating curve for power input, derate linearly to 0.1W at 100°C.

