




WR42(BJ220) Small Size Waveguide Termination, RWT4215 17.6-26.7GHz, 15W, FBP220(UBR) Flange, Rectangular

Dimensions(mm) Tolerance $\pm 1\%$

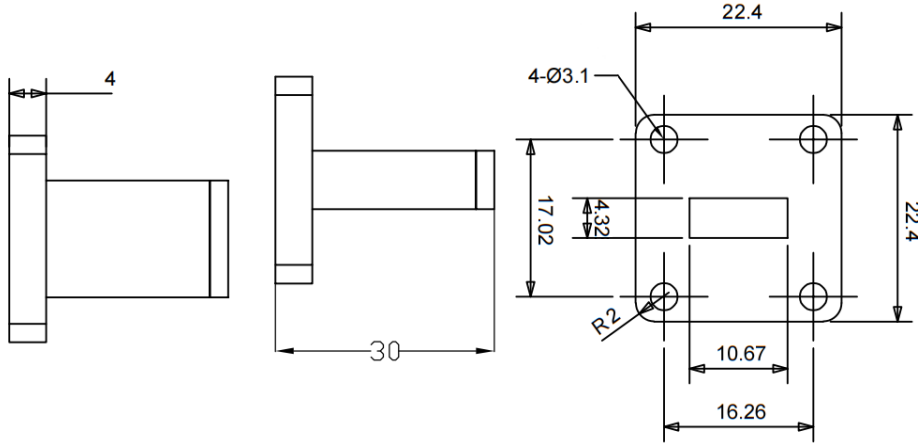


Electrical & Environmental

Frequency Range	17.6-26.7GHz	Impedance	50 ohm	VSWR	1.2 max
Input Avg Power	15W @25°C	Peak Power	-		

Mechanical & Product Information

Product Number	RWT4215, Professional	Waveguide/Flange	WR42(BJ220), FBP220(UBR) Flange
Waveguide Body	Copper, grey painted	Heat Sink	N/A
Waveguide Cavity	Copper, electric conductive oxidation		
Operating Temp		Net Weight	About 24.0g

Typical Test Data

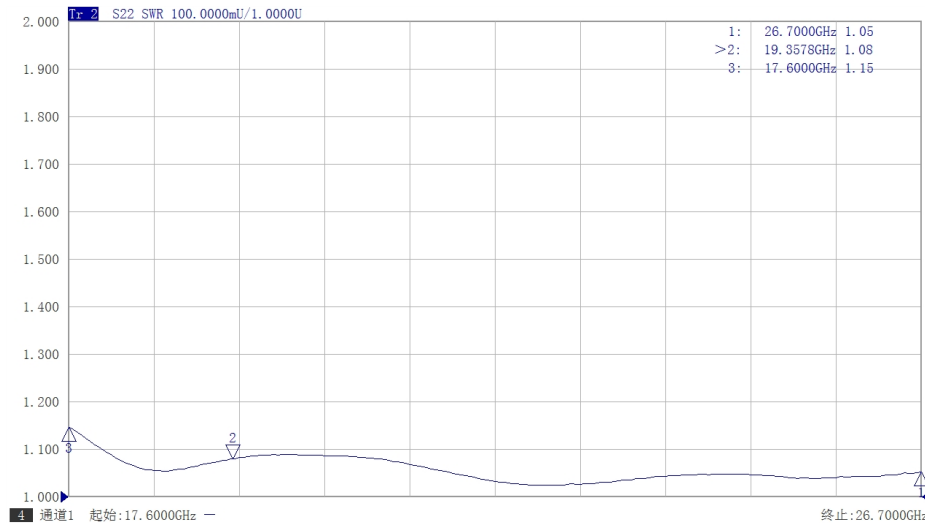

Notes

1. Customized outlines and optimal VSWR available.
2. Refer to the derating curve for power input, derate linearly to 2W at 100°C.
3. To maintain best performance, recommended to use fan to keep the case temp under 85°C.

