




WR42(BJ220) Waveguide Matched Termination, RWT42 17.6-26.7GHz, 1W, FBP220(UBR) Flange, Rectangular

Dimensions(mm) Tolerance±1%

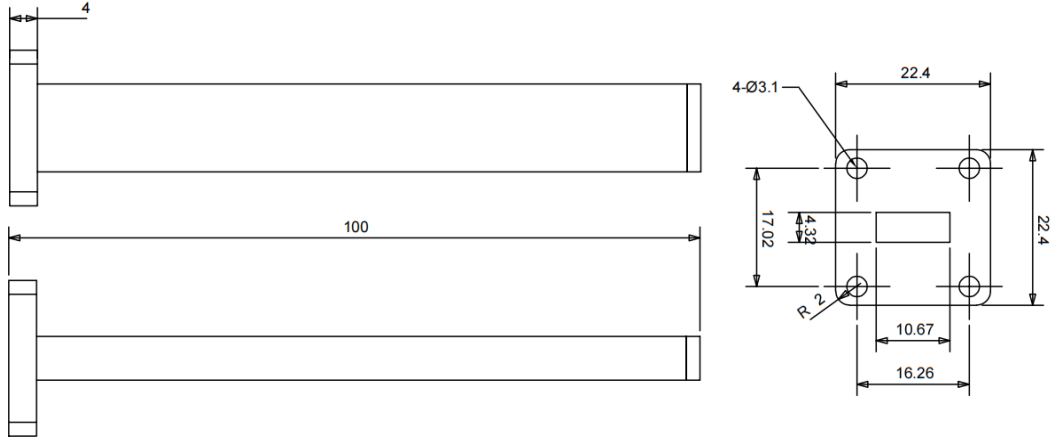


Electrical & Environmental

Frequency Range	17.6-26.7GHz	Impedance	50 ohm	VSWR	1.03 max
Input Avg Power	1W @25°C	Peak Power	-		

Mechanical & Product Information

Product Number	RWT42, High-Precision	Waveguide/Flange	WR42(BJ220), FBP220(UBR) Flange
Waveguide Body	Copper, grey painted	Heat Sink	N/A
Waveguide Cavity	Copper, electric conductive oxidation		
Operating Temp		Net Weight	About 48.0g

Typical Test Data

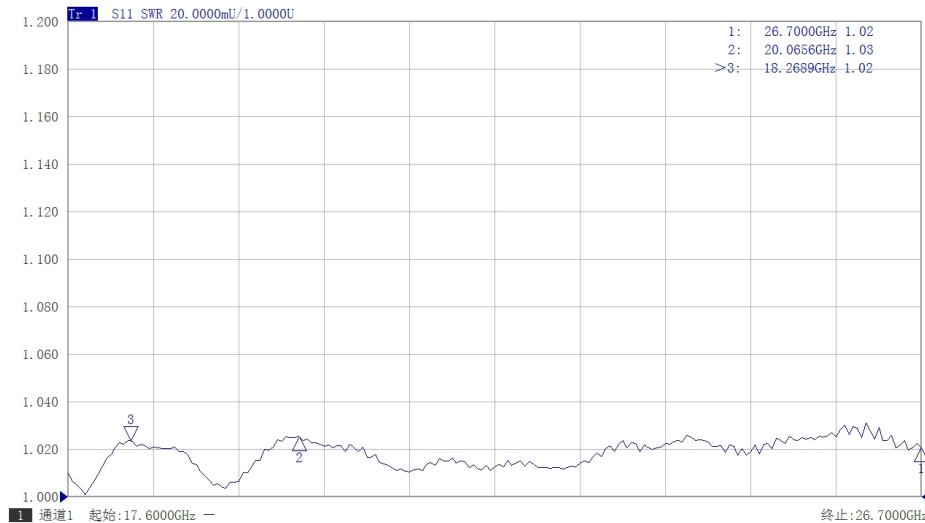

Notes

1. Customized outlines and optimal VSWR available.
2. Refer to the derating curve for power input, derate linearly to 0.1W at 100°C.

