




WR5(BJ1800) Waveguide Termination, RWT5 145-220GHz, 0.5W, FUGP1800 Circular Flange, Round

Dimensions(mm) Tolerance±1%

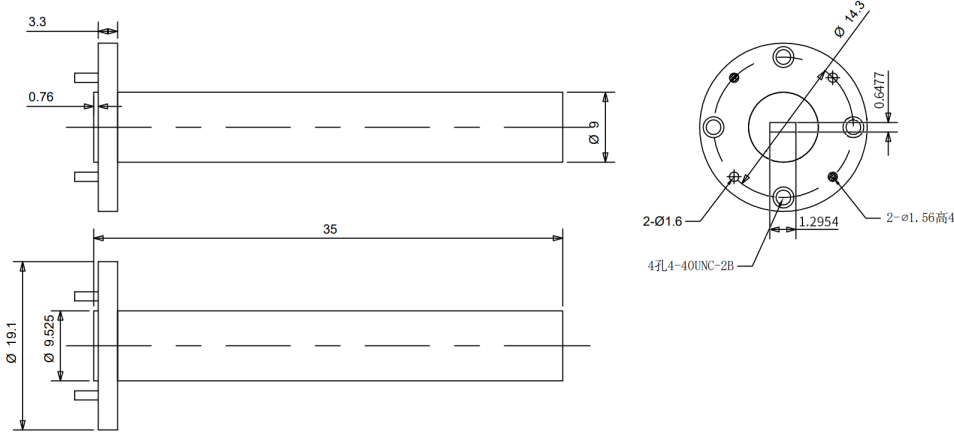


Electrical & Environmental

Frequency Range	145-220GHz	Impedance	50 ohm	VSWR	1.35 max
Input Avg Power	0.5W @25°C	Peak Power	-		

Mechanical & Product Information

Product Number	RWT5, H-Grade	Waveguide	WR5(BJ1800), FUGP1800 Circular Flange
Waveguide Body	Copper, gold plated	Heat Sink	N/A
Waveguide Cavity	Copper, gold plated		
Operating Temp	-55°C~+100°C	Net Weight	About 24.0g

Typical Test Data

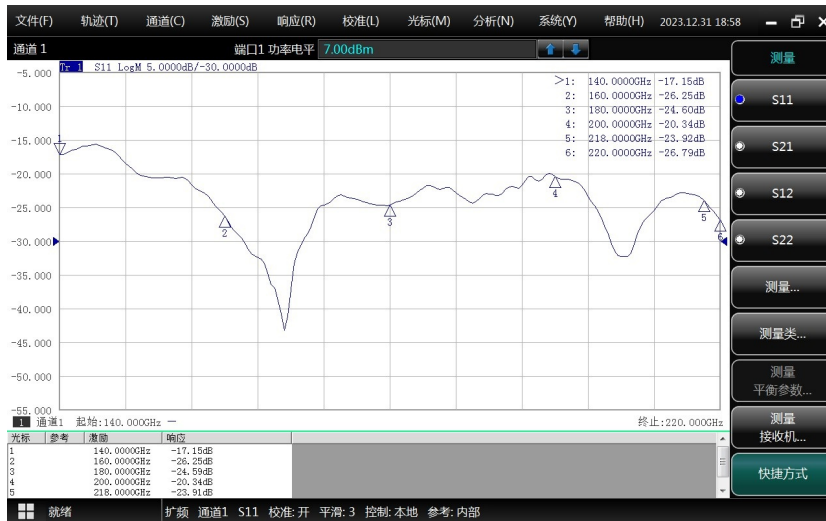

Notes

1. Customized outlines and optimal VSWR available.
2. Refer to the derating curve for power input, derate linearly to 0.1W at 100°C.

