




**WR62(BJ140) Waveguide Termination, RWT62150**  
**12-18GHz, 150W, FBP140(UBR) Flange, Rectangular**

**Dimensions(mm) Tolerance±1%**

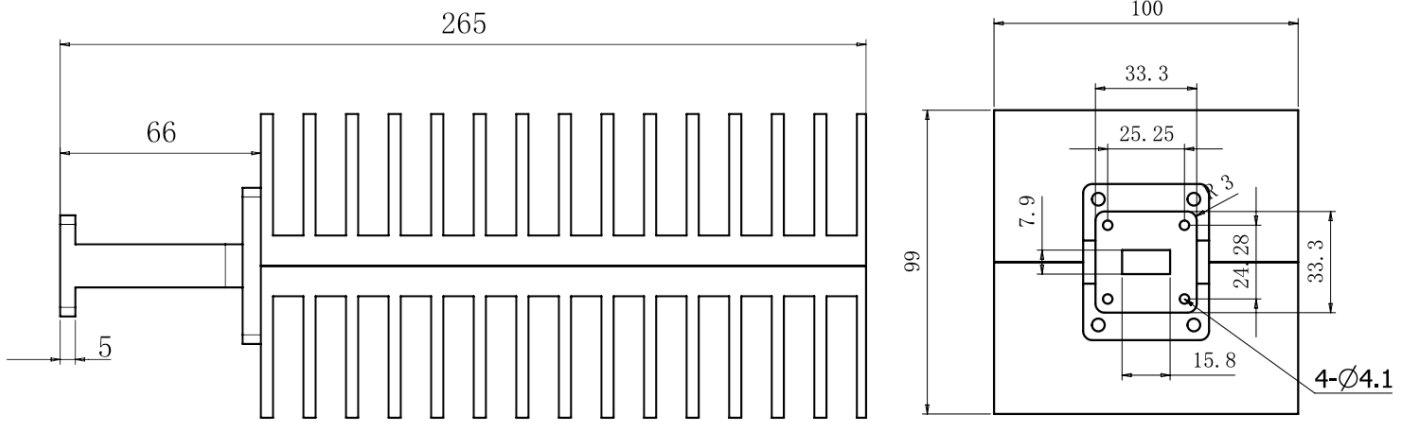


**Electrical & Environmental**

Frequency Range	12-18GHz	Impedance	50 ohm	VSWR	1.2 max
Input Avg Power	150W @25°C	Peak Power	-		

**Mechanical & Product Information**

Product Number	RWT62150, P-Grade, Sealing ring	Waveguide	WR62(BJ140), FBP140(UBR) Flange
Waveguide Body	Aluminum, black painted	Heat Sink	Black anodized aluminum
Waveguide Cavity	Aluminum, electric conductive oxidation		
Operating Temp	-55°C~+100°C	Net Weight	-

**Typical Test Data**

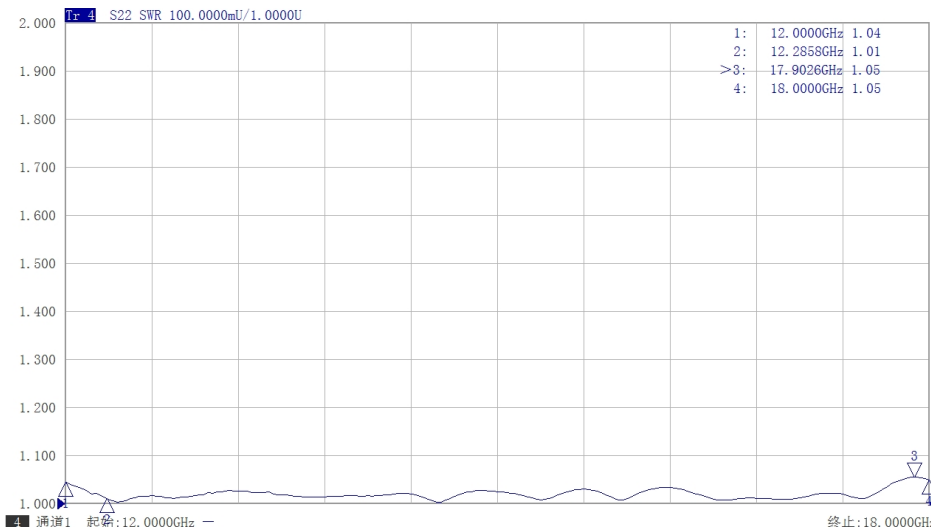

**Notes**

1. Customized outlines and optimal VSWR available.
2. Refer to the derating curve for power input, derate linearly to 15W at 100°C.
3. To maintain best performance, recommended to use fan to keep the case temp under 85°C.

