


## WR650(BJ14) Waveguide Termination, RWT6502000 1.13-1.73GHz, 2000W, UDR14 Flange, Rectangular

### Dimensions(mm) Tolerance±1%

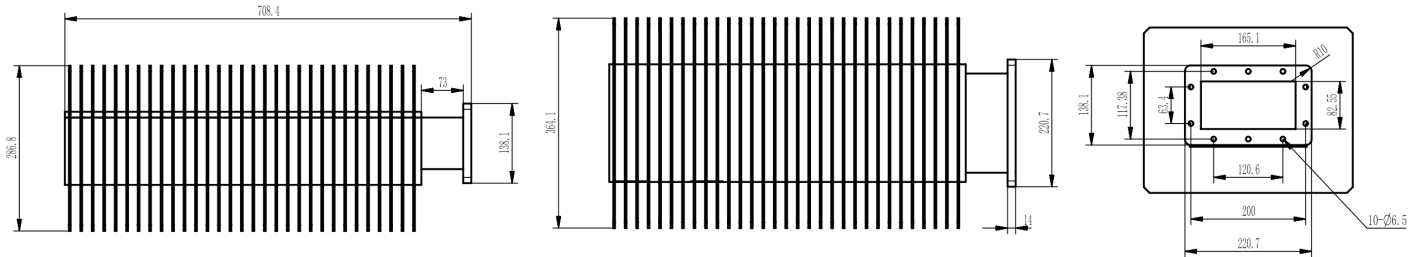

### Electrical & Environmental

<b>Frequency Range</b>	1.13-1.73GHz	<b>Impedance</b>	-	<b>VSWR</b>	1.2 max
<b>Input Avg Power</b>	2000W @25°C	<b>Peak Power</b>	55KW		

### Mechanical & Product Information

<b>Product Number</b>	RWT6502000, P-Grade	<b>Waveguide</b>	WR650(BJ14), UDR14 Flange
<b>Waveguide Body</b>	Aluminum, black painted	<b>Heat Sink</b>	Black anodized aluminum
<b>Waveguide Cavity</b>	Aluminum, electric conductive oxidation		
<b>Operating Temp</b>	-55°C~+100°C	<b>Net Weight</b>	-

1. Customized connectors, dimensions, PIM, VSWR.
2. Refer to the RFTOP Termination selection and usage guide.

**Notes:** To ensure longevity and performance, do not use at full power for a long time. Peak power, pulse width, and duty cycle need to meet the requirements. Input high power, require heat dissipation, maintain temperature within 60°C. Reference Curve, derate linearly to 200W at 100°C.

