WR650(BJ14) Waveguide Matched Termination, RWT650
1.13-1.73GHz, 25W, FDP14(UDR) Flange, Rectangular

Dimensions(mm) Tolerance±1%

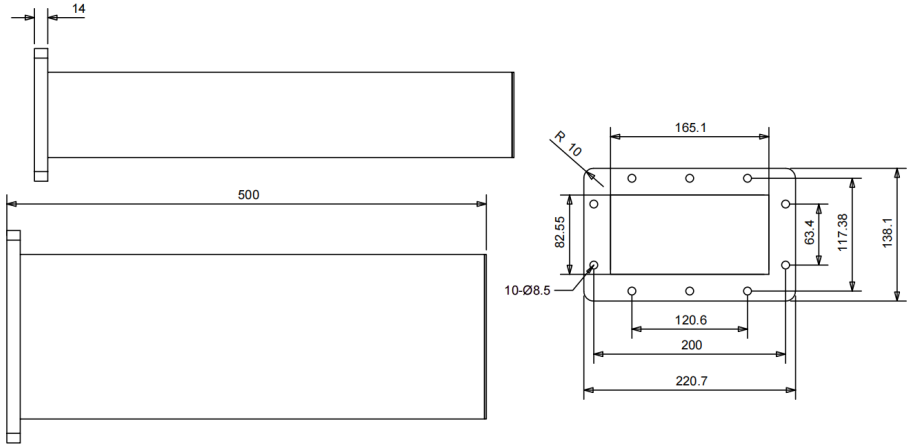

Electrical & Environmental

Frequency Range	1.13-1.73GHz	**Impedance**	50 ohm	**VSWR**	1.03 max
Input Avg Power	25W @25℃	**Peak Power**	-		

Mechanical & Product Information

Product Number	RWT650, High-Precision	**Waveguide/Flange**	WR650(BJ14), FDP14(UDR) Flange
Waveguide Body	Aluminum, grey painted	**Heat Sink**	N/A
Waveguide Cavity	Aluminum, electric conductive oxidation		
Operating Temp		**Net Weight**	-

Typical Test Data

Notes

1.Customized outlines and optimal VSWR available.

2. Refer to the derating curve for power input,derate linearly to **3W at 100℃**.

3.To maintain best performance, recommended to use fan to keep the case temp under 85°C.