




Right Angle Waveguide to Coaxial Adapter, RWR2300N 0.32-0.49GHz, WR2300 to N Female, UDR3 Flange

Dimensions(mm) Tolerance $\pm 1\%$

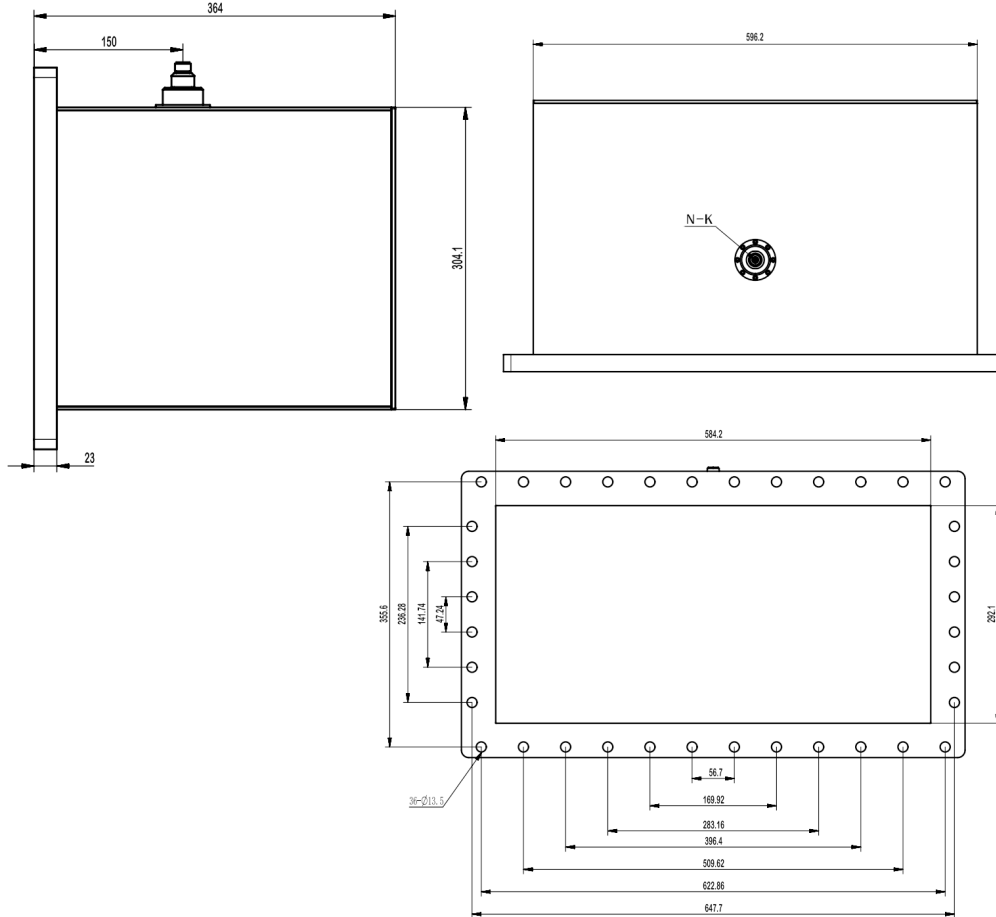

Electrical & Environmental

Frequency Range	0.32-0.49GHz	Impedance	50 ohm	VSWR	1.2 max
Input Avg Power	2000W @25°C	Peak Power	-	Insertion Loss	0.15 dB max

Mechanical & Product Information

Product Number	RWR2300N, H-Grade	Body Geometry	Right Angle
Waveguide Body	Aluminum, grey painted	Waveguide	WR2300, UDR3 Flange
Connector Body	Passivated stainless steel	Coax Connector	N Female
Center Contact	Gold plated beryllium copper		
Operating Temp	-40°C to 70°C	Net Weight	-



Right Angle Waveguide to Coaxial Adapter, RWR2300N
0.32-0.49GHz, WR2300 to N Female, UDR3 Flange

Typical Test Data

