


End Launch Waveguide to Coaxial Adapter, RWR42QE 17.6-26.7GHz, WR42 to 3.5mm Female, UBR220 Flange

Dimensions(mm) Tolerance $\pm 1\%$

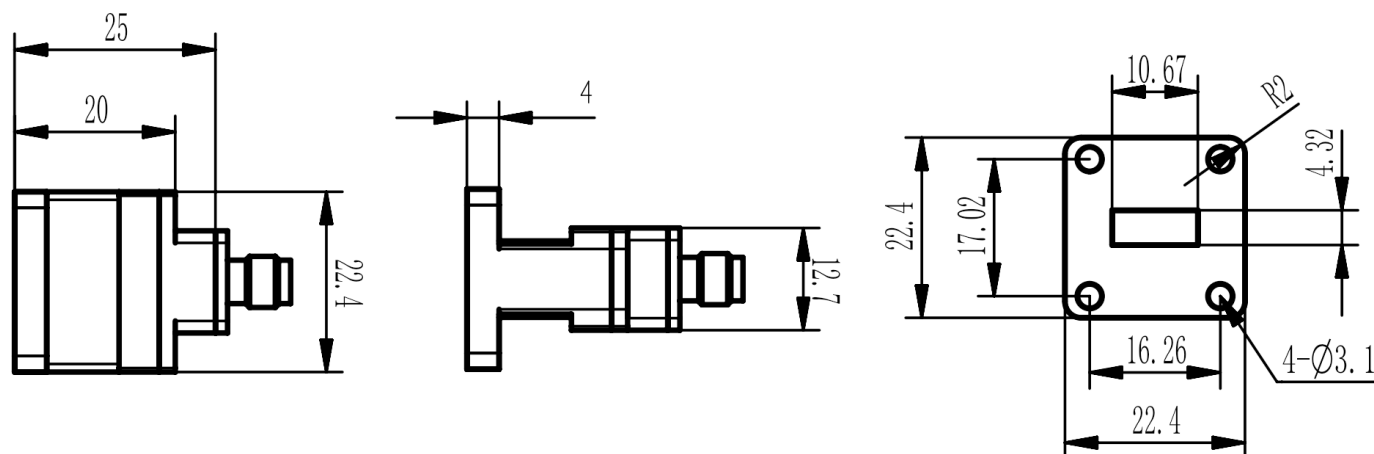

Electrical & Environmental

Frequency Range	17.6-26.7GHz	Impedance	50 ohm	VSWR	1.2 max
Input Avg Power	10W @25°C	Peak Power	3000W	Insertion Loss	00.35 dB max

Mechanical & Product Information

Product Number	RWR42QE, P-Grade	Body Geometry	End Launch
Waveguide Body	Copper, grey painted	Waveguide	WR42, UBR220 Flange
Connector Body	Passivated stainless steel	Coax Connector	3.5mm Female
Center Contact	Gold plated beryllium copper		
Operating Temp	-40°C to 70°C	Net Weight	-