




Right Angle Waveguide to Coaxial Adapter, **RWR430N** 1.72-2.61GHz, WR430 to N Female, UDR22 Flange

Dimensions(mm) Tolerance $\pm 1\%$

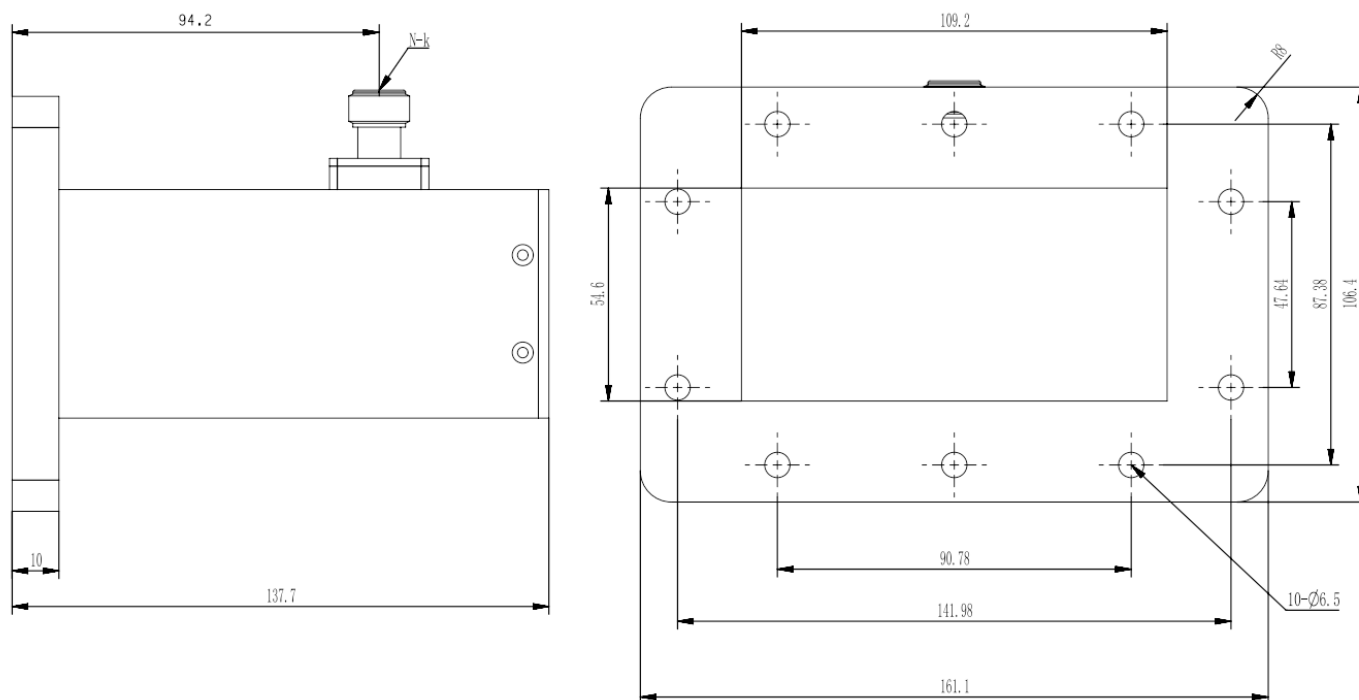

Electrical & Environmental

Frequency Range	1.72-2.61GHz	Impedance	50 ohm	VSWR	1.2 max
Input Avg Power	1000W @25°C	Peak Power	-	Insertion Loss	0.2 dB max

Mechanical & Product Information

Product Number	RWR430N, H-Grade	Body Geometry	Right Angle
Waveguide Body	Aluminum, grey painted	Waveguide	WR430, UDR22 Flange
Connector Body	Passivated stainless steel	Coax Connector	N Female
Center Contact	Gold plated beryllium copper		
Operating Temp	-40°C to 70°C	Net Weight	About 1.1kg



Right Angle Waveguide to Coaxial Adapter, **RWR430N** 1.72-2.61GHz, WR430 to N Female, UDR22 Flange

Typical Test Data

