


Right Angle Double Ridge Waveguide to Coax Adapter, **RWRD1100S** 11-26.5GHz, WRD1100 to SMA Female,

Dimensions(mm) Tolerance $\pm 1\%$

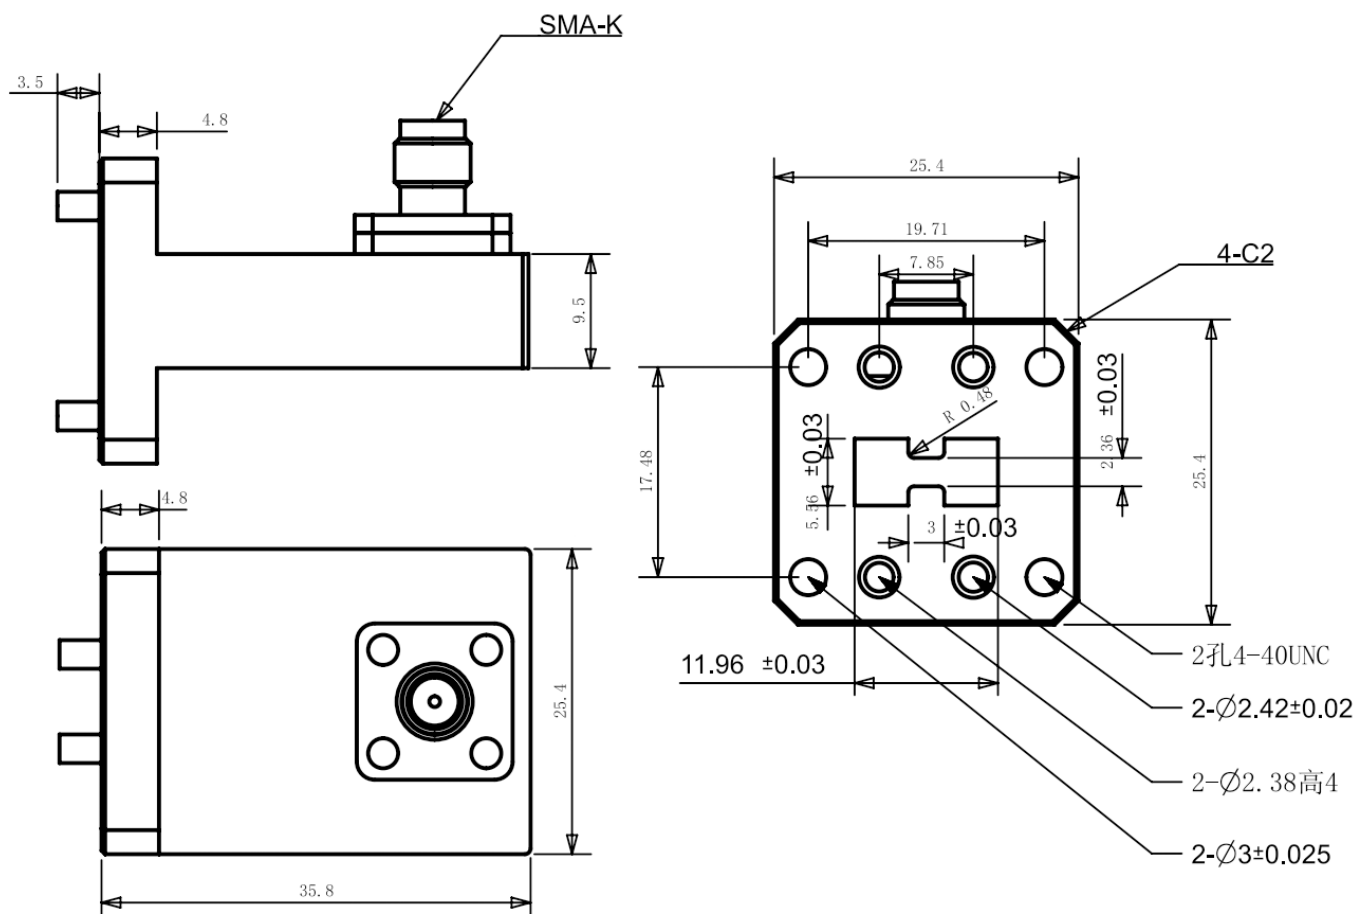

Electrical & Environmental

Frequency Range	11-26.5GHz	Impedance	50 ohm	VSWR	1.25 max
Input Avg Power	20W @25°C	Peak Power	2000W	Insertion Loss	0.7 dB max

Mechanical & Product Information

Product Number	RWRD1100S, H-Grade	Body Geometry	Right Angle
Waveguide Body	Aluminum, grey painted	Waveguide	WRD1100,
Connector Body	Passivated stainless steel	Coax Connector	SMA Female
Center Contact	Gold plated beryllium copper		
Operating Temp	-40°C to 70°C	Net Weight	-