




Right Angle Double Ridge Waveguide to Coax Adapter, **RWRD200N** 2-6GHz, WRD200 to N Female, FPWRD200 Flange

Dimensions(mm) Tolerance $\pm 1\%$

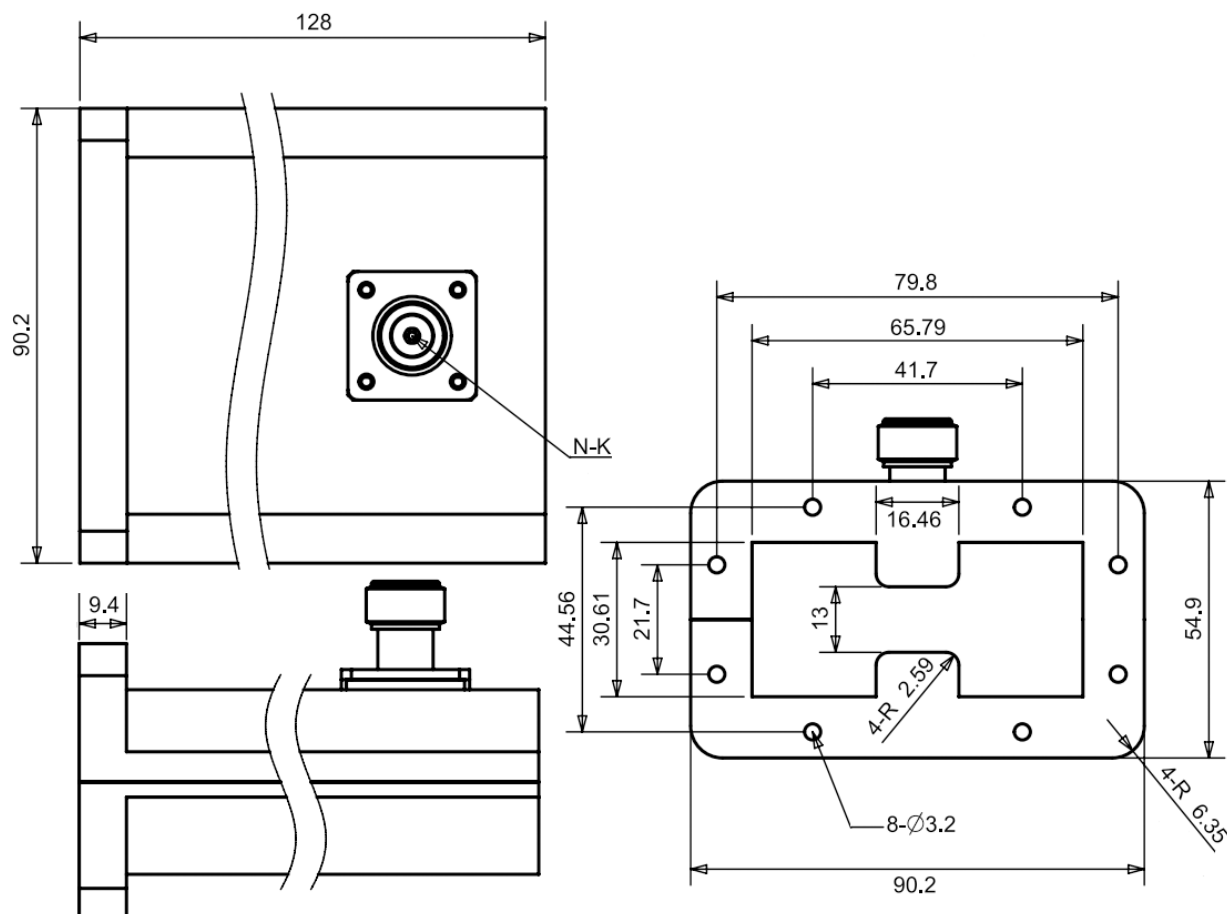

Electrical & Environmental

Frequency Range	2-6GHz	Impedance	50 ohm	VSWR	1.3 max
Input Avg Power	200W @25°C	Peak Power	3000W	Insertion Loss	0.7 dB max

Mechanical & Product Information

Product Number	RWRD200N, H-Grade	Body Geometry	Right Angle
Waveguide Body	Aluminum, grey painted	Waveguide	WRD200, FPWRD200 Flange
Connector Body	Passivated stainless steel	Coax Connector	N Female
Center Contact	Gold plated beryllium copper		
Operating Temp	-40°C to 70°C	Net Weight	About 568.0g



Right Angle Double Ridge Waveguide to Coax Adapter, **RWRD200N** 2-6GHz, WRD200 to N Female, FPWRD200 Flange

Typical Test Data

