


Right Angle Double Ridge Waveguide to Coax Adapter, **RWRD84N** 0.8-2GHz, WRD84 to N Female,

Dimensions(mm) Tolerance $\pm 1\%$

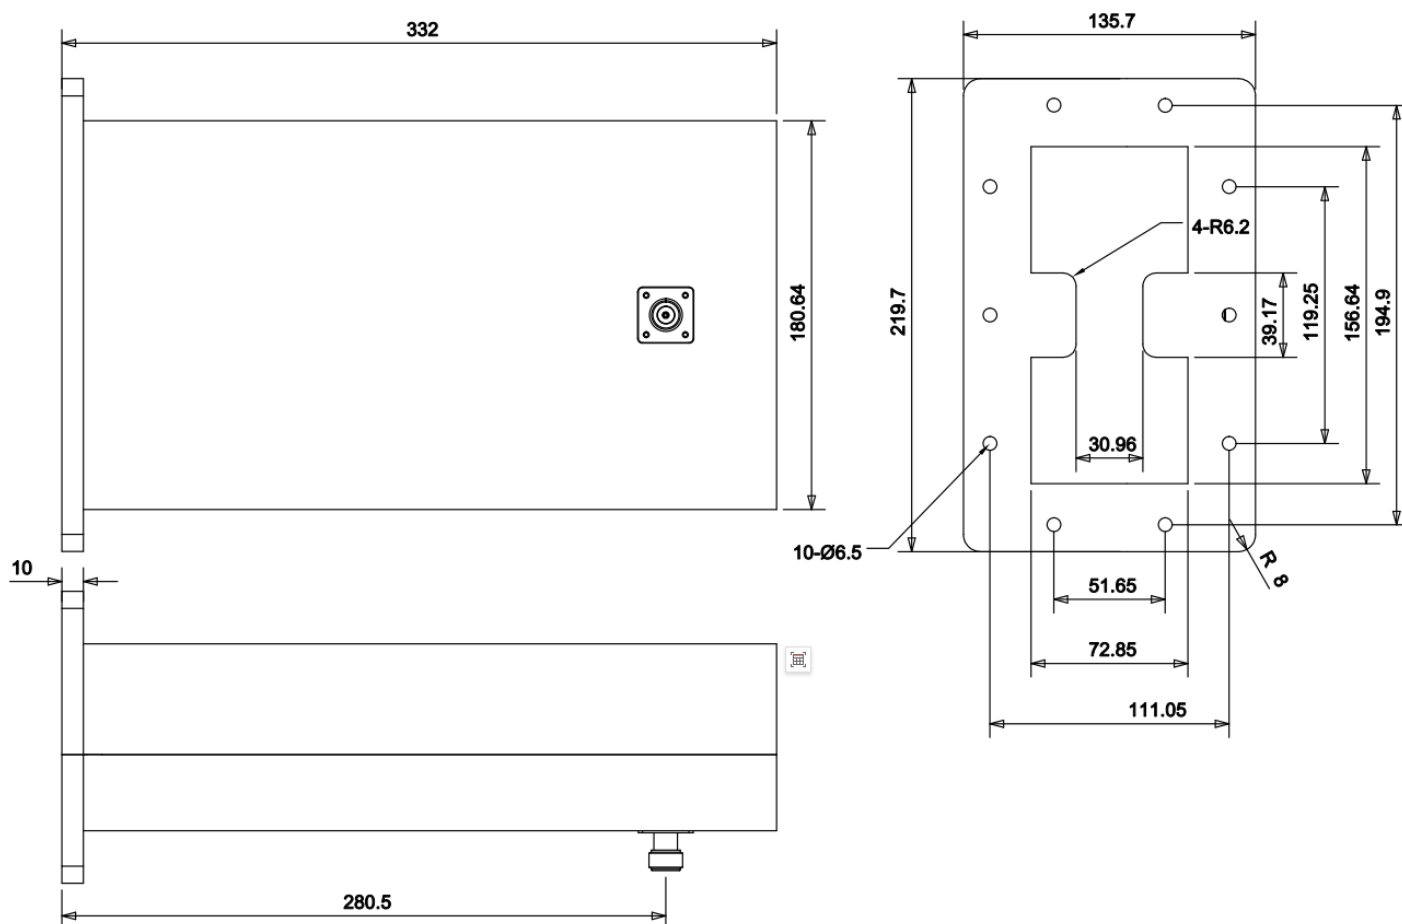

Electrical & Environmental

Frequency Range	0.8-2GHz	Impedance	50 ohm	VSWR	1.3 max
Input Avg Power	200W @25°C	Peak Power	5000W	Insertion Loss	0.7 dB max

Mechanical & Product Information

Product Number	RWRD84N, H-Grade	Body Geometry	Right Angle
Waveguide Body	Aluminum, grey painted	Waveguide	WRD84,
Connector Body	Passivated stainless steel	Coax Connector	N Female
Center Contact	Gold plated beryllium copper		
Operating Temp	-40°C to 70°C	Net Weight	-