


WR187(BJ48) 2 Way Waveguide Magic Tee, RWMT187 3.94-5.99GHz(20%), W, UDR48 Flange

Dimensions(mm) Tolerance $\pm 1\%$

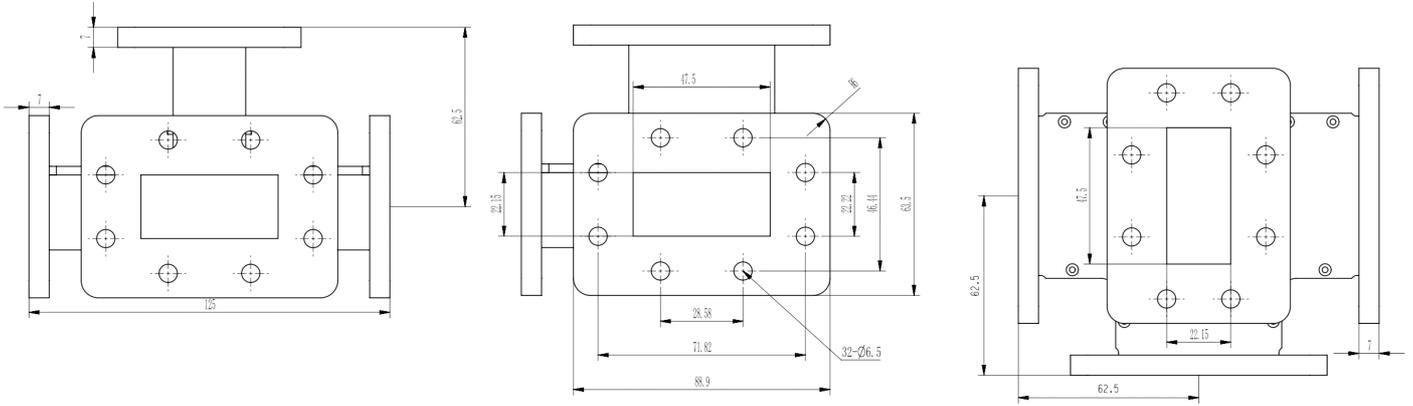

Electrical & Environmental

Frequency Range	3.94-5.99GHz(20%)		
Input Port VSWR	1.2 Max	Output Port VSWR	1.2 Max
Insertion Loss	0.30dB Max		
Isolation	20dB min		
Operating Temp	-40°C ~ +70°C		

Mechanical & Product Information

Product Number	RWMT187	Way	2
Waveguide	WR187(BJ48), UDR48 Flange	Waveguide Body	Aluminum, grey painted
Center Contact	Aluminum, electric conductive oxidation		
Housing	Grey paint		
Dimensions	125×62.5×88.9mm	Net Weight	-