


WR112(BJ84) 1/4 Line, RWGQL112
7.05-10GHz, FBP84(UBR) Flange

Dimensions(mm) Tolerance±1%

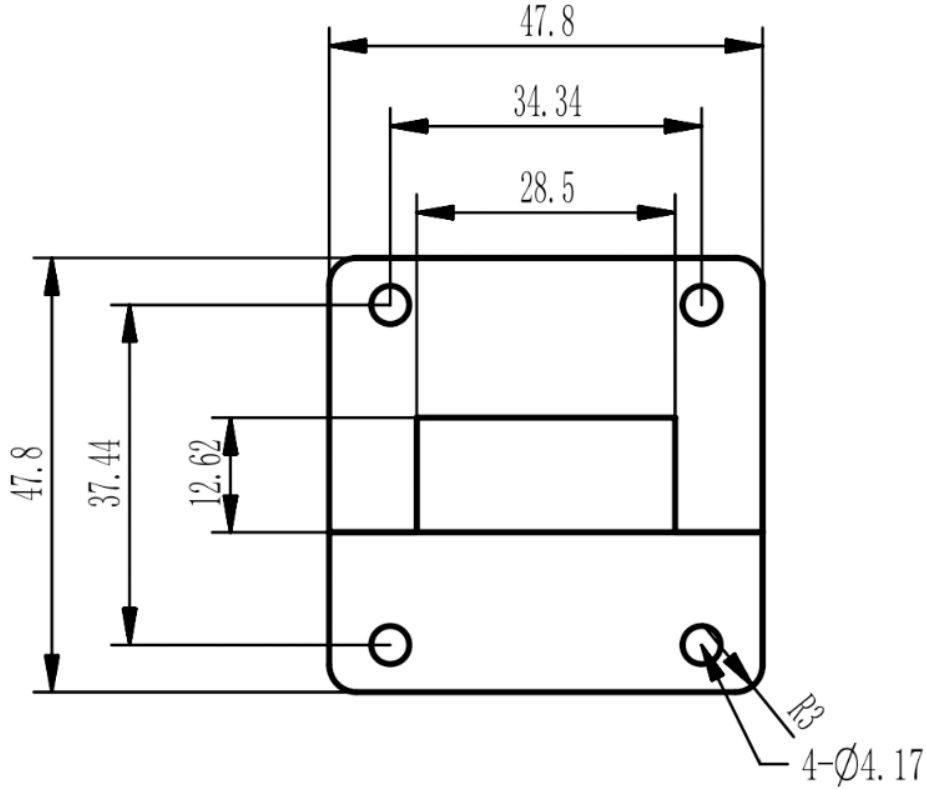

Electrical & Environmental

| | |
|--------------------------|---------------|
| Frequency Range | 7.05-10GHz |
| Temperature Range | -40°C to 70°C |

Mechanical & Product Information

| | |
|-----------------------|---|
| Product Number | RWGQL112 |
| Product Type | 1/4 Line |
| Waveguide 1 | WR112(BJ84), FBP84(UBR) Flange |
| Waveguide 2 | WR112(BJ84), FBP84(UBR) Flange |
| Waveguide Body | Aluminum, grey painted |
| Center Contact | Aluminum, electric conductive oxidation |