


WR51(BJ180) 1/4 Line, RWGQL51
14.5-22GHz, FBP180(UBR) Flange

Dimensions(mm) Tolerance $\pm 1\%$

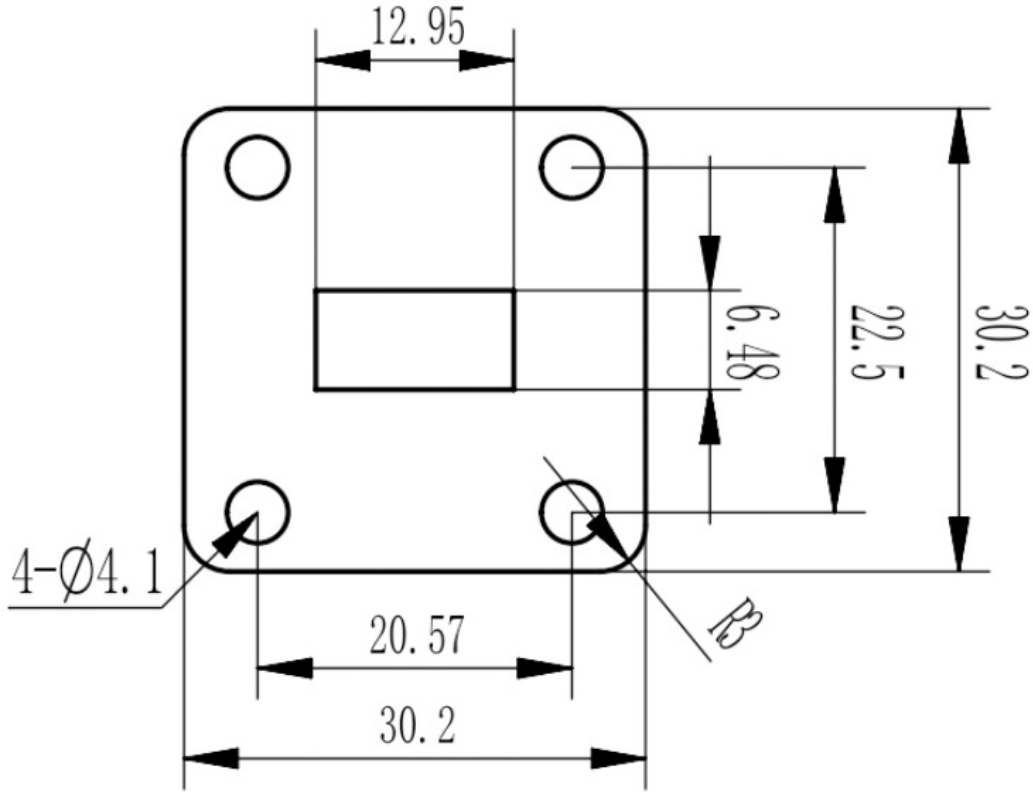

Electrical & Environmental

Frequency Range	14.5-22GHz
Temperature Range	-40°C to 70°C

Mechanical & Product Information

Product Number	RWGQL51
Product Type	1/4 Line
Waveguide 1	WR51(BJ180), FBP180(UBR) Flange
Waveguide 2	WR51(BJ180), FBP180(UBR) Flange
Waveguide Body	Copper, grey painted
Center Contact	Copper pickling