


## WR12 Standard Gain Horn Antenna, 1.0mm Female, **RWHAL12W-20** 60.5-91.9GHz, 20dB Nominal Gain, FUGP740 Circular Flange, Right Angle

### Dimensions(mm) Tolerance $\pm 1\%$

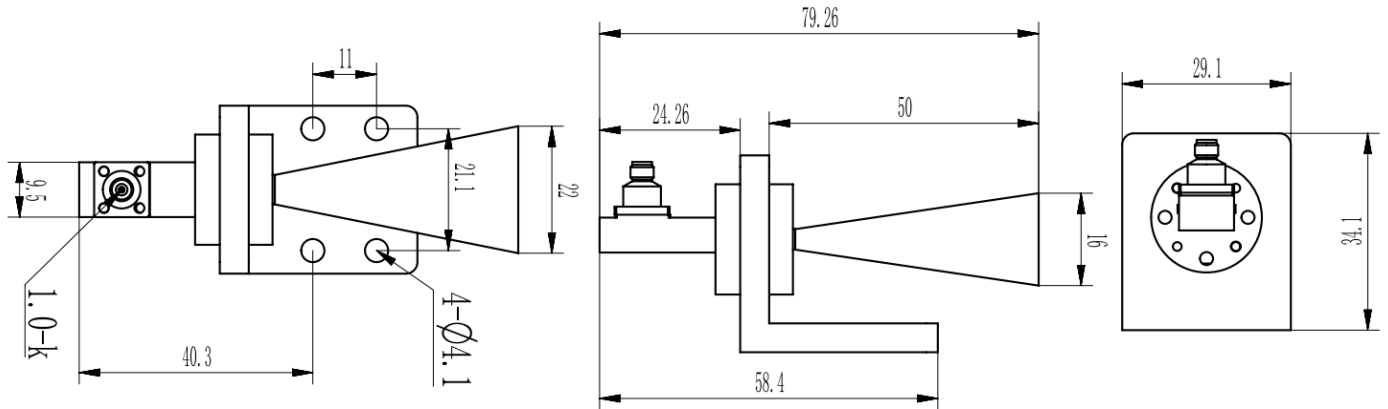

### Electrical & Environmental

<b>Frequency Range</b>	60.5-91.9GHz	<b>Impedance</b>	50 Ohm
<b>VSWR</b>	1.2 Max		
<b>Nominal Gain</b>	20 dBi		

### Mechanical & Product Information

<b>Product Number</b>	RWHAL12W-20, P-Grade, With bracket	<b>Product Type</b>	Standard Gain Horn Antenna
<b>Connector</b>	1.0mm Female, Right Angle	<b>Connector Body</b>	Passivated stainless steel
<b>Waveguide</b>	WR12(BJ740), FUGP740 Circular Flange	<b>Waveguide Body</b>	Copper, gold plated
<b>Center Contact</b>	Copper, gold plated		
<b>Dimensions</b>	79.26(L)*22(W)*16(H)mm	<b>Net Weight</b>	-



Microwave and Millimeter wave products  
supplier

RFTOP® Technology Co., Ltd.  
[www.rftop.com](http://www.rftop.com) [service@rftop.com](mailto:service@rftop.com) 86-755-88840350