




N Coaxial Fixed Attenuator, R18N250FFUA-XX DC-18GHz, 250W, 10-60dB, Unidirectional, Rectangular

Dimensions(mm) Tolerance±1%

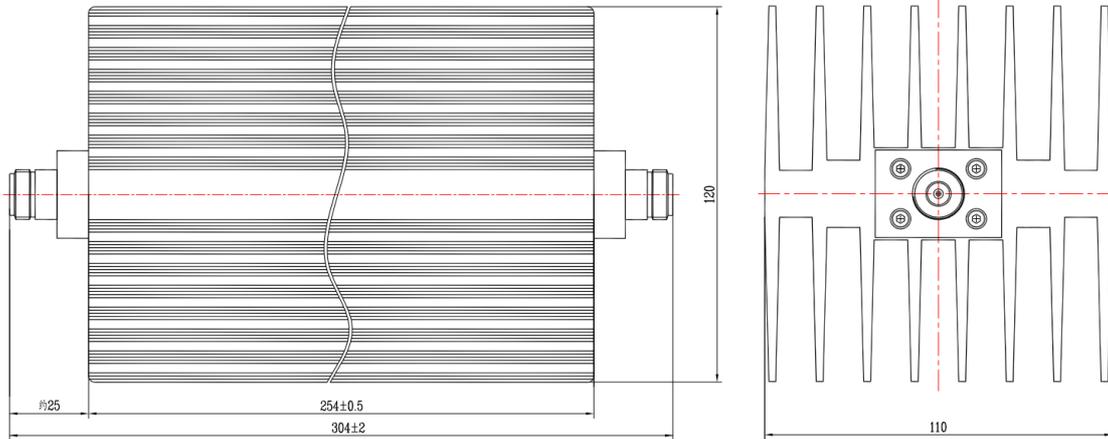

Electrical & Environmental

Frequency Range	DC-18GHz , 50Ohms
VSWR	1.45 Max
Input Avg Power	250W @25°C
Peak Power	1kW (5μsec pulse width, 10% duty cycle)
Temp Coefficient	<0.0004 dB/dB/°C
Direction	Unidirectional, N female input to N female output
Attenuation	10-60dB
Operating Temp	-55°C~+125°C

Product Selection, Customizable

RFTOP P/N	ATTEN	Accuracy
R18N250FFUA-10	10 dB	±3.0 dB
R18N250FFUA-20	20 dB	±3.0 dB
R18N250FFUA-30	30 dB	±1.5 dB
R18N250FFUA-40	40 dB	±1.3 dB
R18N250FFUA-50	50 dB	±1.4 dB
R18N250FFUA-60	60 dB	±1.4 dB

Notes: Pay attention to input/output. To ensure longevity and performance, do not use at full power for a long time. Peak power, pulse width, and duty cycle need to meet the requirements. Input high power, require heat dissipation, maintain temperature within 60°C. Reference Curve, derate linearly to 25W at 100°C.

Mechanical & Product Information

Product Number	R18N250FFUA-XX
Product Type	Coaxial Fixed Attenuator, P-Grade
Connector	N female, N female
Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper
Heat Sink	Black anodized aluminum
Net Weight	About 3.5kg

1. Customized connectors, dimensions, directionality, PIM, dB values.
2. Refer to the RFTOP attenuator selection and usage guide.

Power derating Versus temperature

