


## TNC 8 Way Microstrip Power Divider, RPD018F062T8 180-620MHz, 1W

### Dimensions(mm) Tolerance±1%

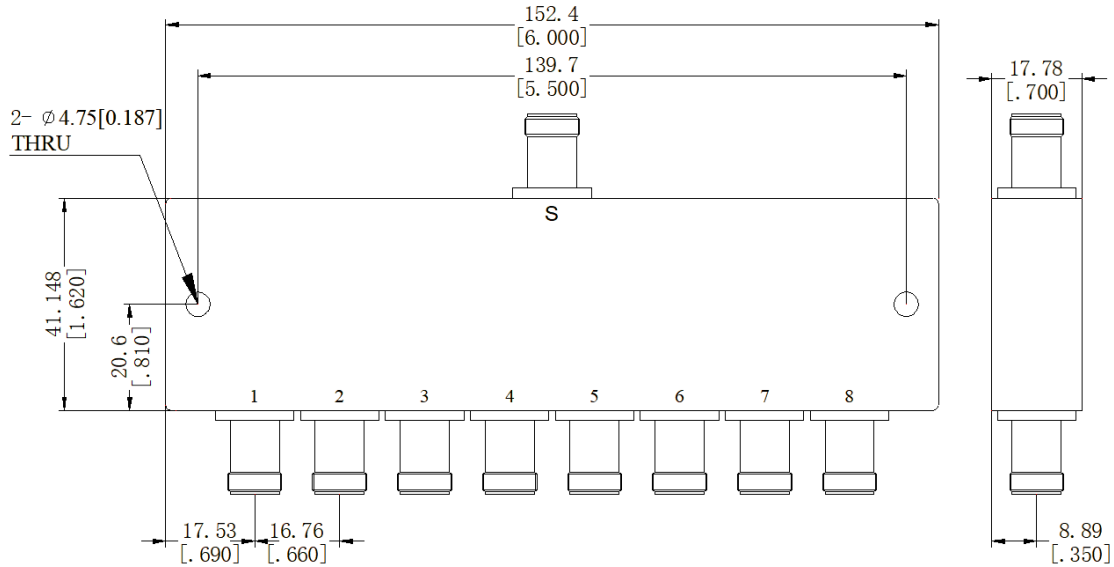

### Electrical & Environmental

<b>Frequency Range</b>	180-620MHz	<b>Impedance</b>	50 Ohm
<b>Input Port VSWR</b>	1.5 max		
<b>Output Port VSWR</b>	1.5 max		
<b>Insertion Loss</b>	2dB max (Excluding theoretical loss未含理论损耗9.0dB)		
<b>Isolation</b>	20dB min		
<b>Amplitude Balance</b>	± 0.4dB		
<b>Phase Balance</b>	±5°		
<b>Input Avg Power</b>	1 Watts max @25°C (Combiner合路器用时0.5W)		
<b>Operating Temp</b>	-40°C ~ +85°C		

### Mechanical & Product Information

<b>Product Number</b>	RPD018F062T8	<b>Way</b>	8
<b>Connector</b>	TNC Female	<b>Connector Body</b>	Ternary alloy plated brass
<b>Center Contact</b>	Gold plated beryllium copper		
<b>Housing</b>	Sandblasting natural color conductive oxide		
<b>Dimensions</b>	41.148×152.4×17.78mm	<b>Net Weight</b>	-