


SMA 32 Way Microstrip Power Divider, RPD1606F1704S32 16.6-17.4GHz, 20W , P-Grade

Dimensions(mm) Tolerance±1%

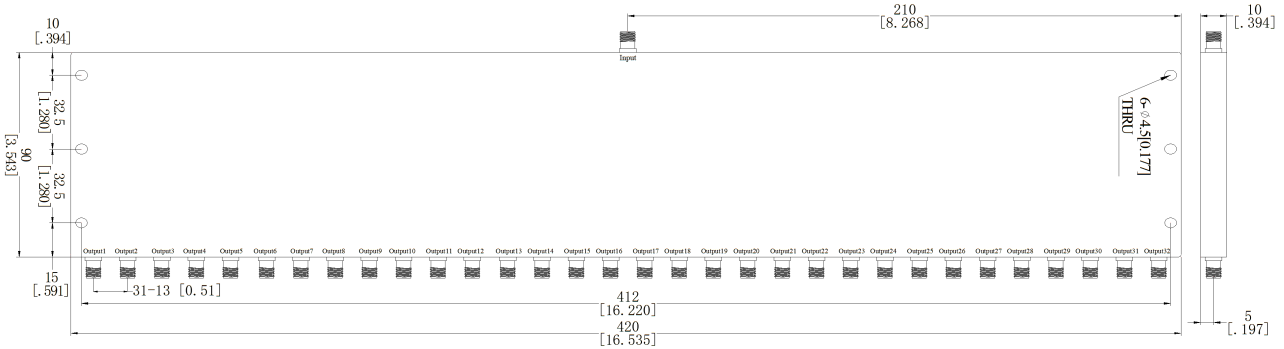

Electrical & Environmental

Frequency Range	16.6-17.4GHz	Impedance	50 Ohm
Input Port VSWR	1.6 max (Typ.1.22)		
Output Port VSWR	1.3 max (Typ.1.16)		
Insertion Loss	2.8dB max (Excluding theoretical loss未含理论损耗15.0dB)		
Isolation	18dB min (Typ.22dB)		
Amplitude Balance	± 0.5dB		
Phase Balance	±10°		
Input Avg Power	20 Watts max @25°C (Derate linearly to 2 Watt at 100°C) (Combiner合路器用时1W)		
Operating Temp	-45°C ~ +85°C		

Mechanical & Product Information

Product Number	RPD1606F1704S32, P-Grade	Way	32
Connector	SMA Female	Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper		
Housing	Black paint		
Dimensions	420×90×10mm	Net Weight	-