


SMA 4 Way Resistive Power Divider, RPD2S4 DC-2GHz, 2W

Dimensions(mm) Tolerance $\pm 1\%$

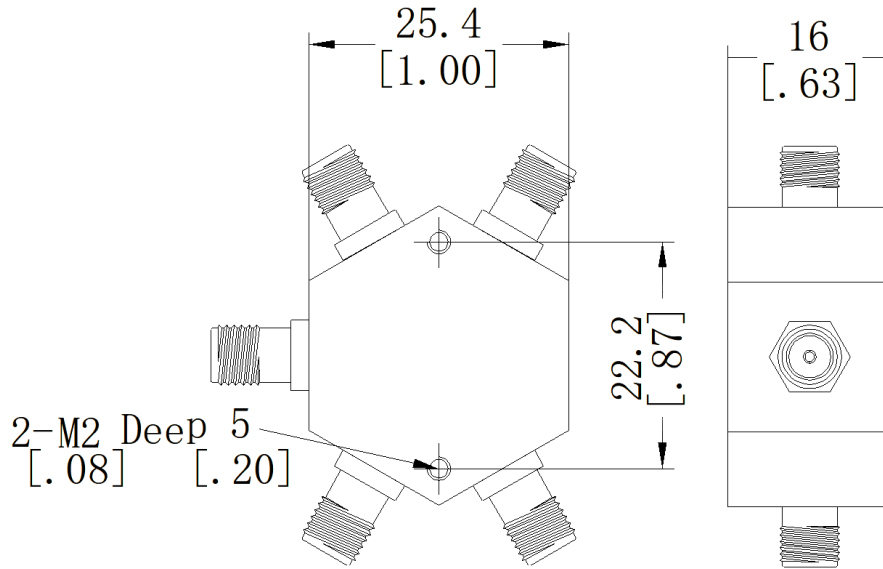

Electrical & Environmental

Frequency Range	DC-2GHz	Impedance	50 Ohm
Input Port VSWR	1.25 max (Typ.1.11)		
Output Port VSWR	1.25 max (Typ.1.11)		
Insertion Loss	13dB max		
Isolation	11.5dB min		
Amplitude Balance	± 0.6 dB		
Input Avg Power	2 Watts max @25°C (Derate linearly to 0.2 Watt at 100°C)		
Operating Temp	-35°C ~ +75°C		

Mechanical & Product Information

Product Number	RPD2S4	Way	4
Connector	SMA Female	Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper		
Housing	Sandblasting natural color conductive oxide		
Dimensions	25.4×29.3×16mm	Net Weight	About 30.0g

SMA 4 Way Resistive Power Divider, RPD2S4 DC-2GHz, 2W

Typical Test Data

