


WR229(R40) Flexible Waveguide, RWGFT229-L 3.22-4.9GHz, 4000W, UDR40 Flange, Twistable

Dimensions(mm) Tolerance $\pm 1\%$

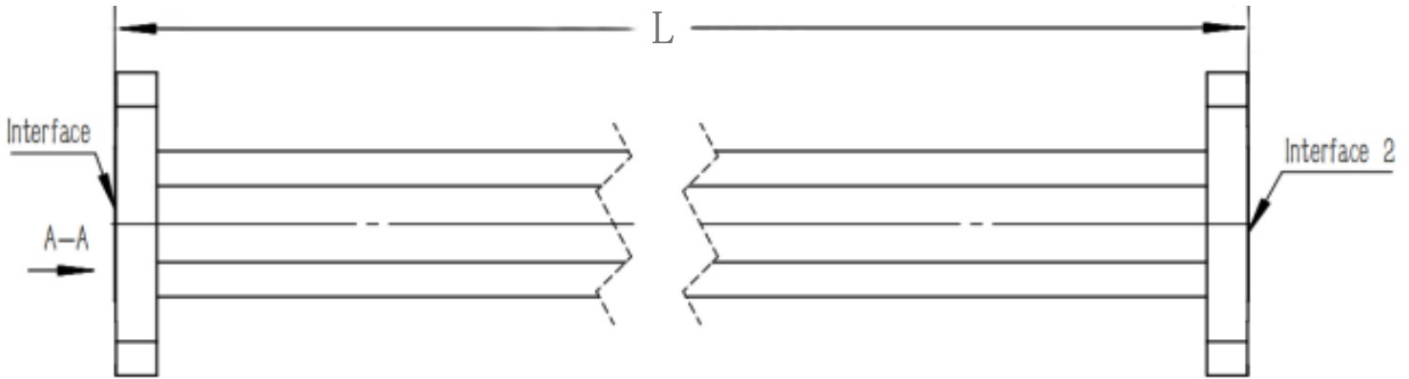

Electrical & Environmental

Frequency Range	3.22-4.9GHz
VSWR	1.1 Max
Input Avg Power	4000W @25°C
Min Bend Radius	165mm/E 330mm/H
Repeated Bend Radius	654mm/E 1328mm/H
Max. Torsion Angle	132°/m
Operating Pressure	30psig Max
Temperature Range	-40°C~+75°C

Product Selection, Customizable

RFTOP P/N	L(mm)	L2(mm)	IL(dB)
-----------	-------	--------	--------

Notes

1. Customized services include: length and structure and flange type.
2. The marked loss is the theoretical estimated loss, for reference only, the specific product after processing test shall prevail.
3. Please refer to the second page of the specification of typical electrical performance measured curve.

Mechanical & Product Information

Product Number	RWGFT229-L
Product Type	Flexible Waveguide
Waveguide 1	WR229(R40), UDR40 Flange
Waveguide 2	WR229(R40), UDR40 Flange
Waveguide Body	Brass
Center Contact	Brass, silver plating