




SMA Male Coaxial Termination, RT182SME DC-18GHz, 2W, Round

Dimensions(mm) Tolerance±1%

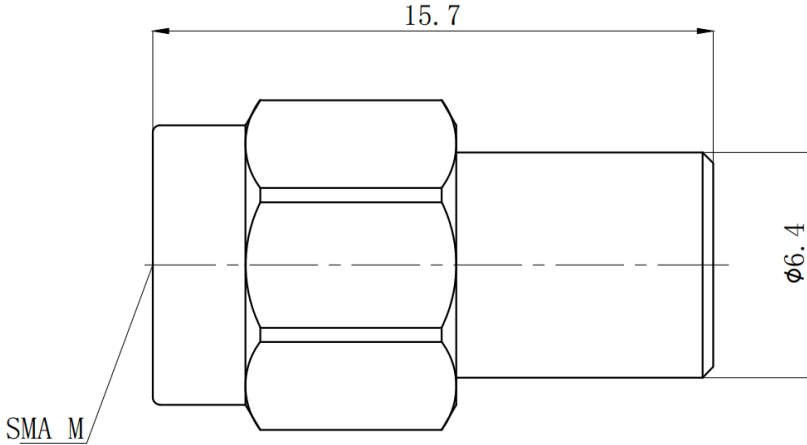

Product Selection, Customizable

RFTOP P/N	Grade	VSWR
RT182SME	Standard	≤1.20
RT182SME-B	B	≤1.15
RT182SME-A	A	≤1.10


Electrical & Environmental

Frequency Range	DC-18GHz	Impedance	50 ohm	VSWR	1.2 max
Input Avg Power	2W @25°C	Peak Power	250W (5μsec pulse width, 0.4% duty cycle)		

Mechanical & Product Information

Product Number	RT182SME, E-Grade	Connector	SMA Male
Connector Body	Passivated stainless steel	Heat Sink	N/A
Center Contact	Gold plated brass		
Operating Temp	-55°C~+85°C	Net Weight	-

Typical Test Data

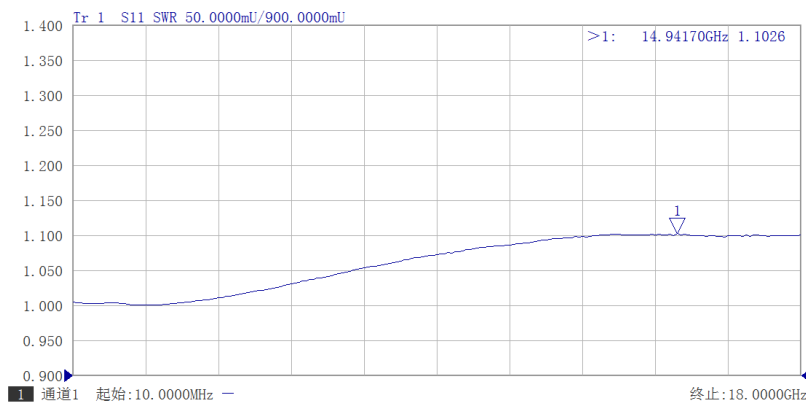

1. Customized connectors, dimensions, PIM, VSWR.
2. Refer to the RFTOP Termination selection and usage guide.

Notes: To ensure longevity and performance, do not use at full power for a long time. Peak power, pulse width, and duty cycle need to meet the requirements. Input high power, require heat dissipation, maintain temperature within 60°C. Reference Curve, derate linearly to 0.2W at 100°C.

