




## N Male Coaxial Termination, RT4300NMA DC-4GHz, 300W, Rectangular

### Dimensions(mm) Tolerance $\pm 1\%$

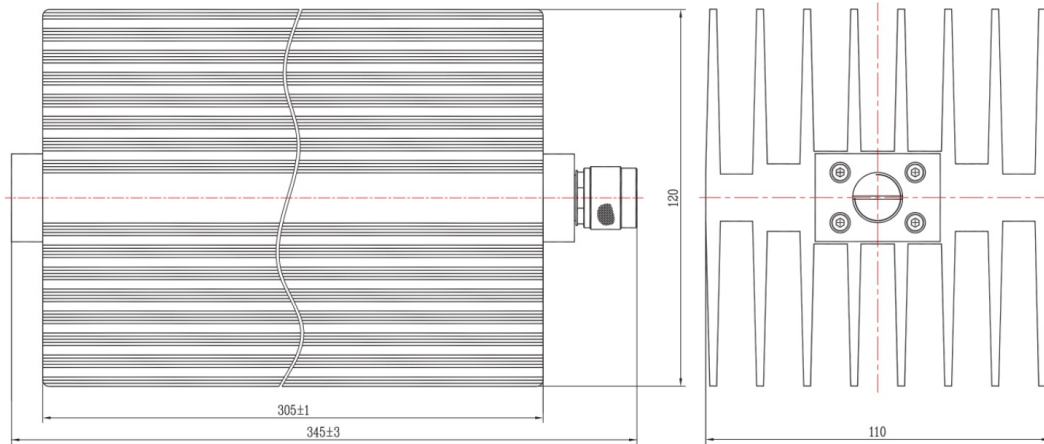

### Electrical & Environmental

<b>Frequency Range</b>	DC-4GHz	<b>Impedance</b>	50 ohm	<b>VSWR</b>	1.2 max
<b>Input Avg Power</b>	300W @25°C	<b>Peak Power</b>	5kW (5μsec pulse width, 2% duty cycle)		

### Mechanical & Product Information

<b>Product Number</b>	RT4300NMA, Professional	<b>Connector</b>	N Male
<b>Connector Body</b>	Ternary alloy plated brass	<b>Heat Sink</b>	Black anodized aluminum
<b>Center Contact</b>	Gold plated brass		
<b>Operating Temp</b>		<b>Net Weight</b>	-

### Typical Test Data

#### Notes

1. Customized outlines and optimal VSWR available.
2. Refer to the derating curve for power input, derate linearly to 30W at 100°C.
3. To maintain best performance, recommended to use fan to keep the case temp under 85°C.

