




N Male Coaxial Termination, RT6300NMAH DC-6GHz, 300W, Rectangular

Dimensions(mm) Tolerance±1%

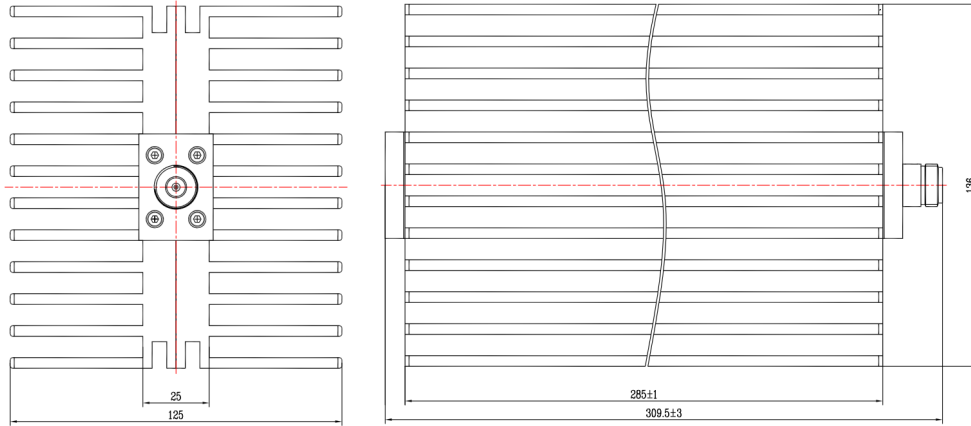

Electrical & Environmental

Frequency Range	DC-6GHz	Impedance	50 ohm	VSWR	1.3 max
Input Avg Power	300W @25°C	Peak Power	10kW (5μsec pulse width, 2% duty cycle)		

Mechanical & Product Information

Product Number	RT6300NMAH, P-Grade, Anti-pulse	Connector	N Male
Connector Body	Ternary alloy plated brass	Heat Sink	Black anodized aluminum
Center Contact	Gold plated beryllium copper		
Operating Temp	-55°C~+125°C	Net Weight	-

Typical Test Data

Notes

1. Customized outlines and optimal VSWR available.
2. Refer to the derating curve for power input, derate linearly to 30W at 100°C.
3. To maintain best performance, recommended to use fan to keep the case temp under 85°C.

